



Flawless  
**FLUTES**  
SERIES 15000, 16000

by



Decorating  
**India**

ISO 9001, 14001 & 45001 CERTIFIED COMPANY PRODUCTS

**L1**

EDITION  
25 / 26



ADVANCE  
DECORATIVE LAMINATES

Flawless  
**FLUTES**  
SERIES 15000, 16000



DOWNLOAD  
E-FOLDER

**L1**



ADVANCE DECORATIVE LAMINATES  
(An ISO 9001 ISO 14001 & ISO 45001 Certified Company)

Email: [info@advancelam.com](mailto:info@advancelam.com)  
[www.advancelam.com](http://www.advancelam.com)

Tollfree 1800 103 4740 (Mon to Sat, 10-7pm IST)

24



## ADVANCE FLAWLESS FLUTES:

### Let your walls speak style

Advance Flawless flutes are modern architectural elements that beautifully combine aesthetic charm with practical utility. Designed with sleek, linear slats, these panels add a bold and contemporary look to any interior space. Whether vertical or horizontal, their elegant lines create a rhythmic play of light and shadow, enhancing the spatial dynamics of walls, ceilings, and facades.

Crafted from high-quality materials, Advance Flawless Flutes are available in a range of finishes—wood grain, matte, and textured. They not only offer excellent dimensional stability and durability but are also resistant to moisture, termites, and warping, making them ideal for long-term use.

Easy to install and low in maintenance, Advance Flawless Flutes are the go-to choice for architects and designers seeking both function and finesse. They're perfect for creating a cozy, structured, and luxurious ambiance in both residential and commercial environments.



## IMPORTANCE OF FLAWLESS FLUTES IN YOUR INTERIOR

Integrating louver panels into interior design is a smart choice for those seeking a perfect balance of style, sophistication, and utility. Here are five compelling features that make louver panels a standout option for modern interiors:

1

### AESTHETIC APPEAL

Advance Flawless Flutes provide a clean, linear, and architectural look to any space. Their rhythmic slat design adds depth, texture, and a sense of movement to walls and ceilings. Whether in natural wood tones or contemporary matte finishes, it enhances visual interest and elevates the overall ambiance.

2

### ACOUSTIC BENEFITS

The design of Advance Flawless Flutes help to absorb and deflect sound, making them ideal for creating quieter, more comfortable spaces. They're perfect for home theatres, conference rooms, or bedrooms where sound control is important.

3

### SPACE ZONING & VERSATILITY

Advance Flawless Flutes can be used as decorative dividers or partitions, offering semi-privacy while maintaining openness and airflow. This makes them a stylish solution for creating zones within homes or office spaces.

4

### EASY INSTALLATION & MAINTENANCE

Designed for user convenience, these panels are lightweight, modular, and easy to install on various surfaces. Their finishes are generally resistant to dust and stain, requiring minimal cleaning and upkeep.

**SERIES 15000, 16000**

**MATERIAL : PS LOUVERS**  
**LENGTH : 9.5FT. | WIDTH : 8 , 9.5 & 10 INCH**

# FEATURES



## LONG-LIFE FLUTES BUILT TO ENDURE

Crafted with superior materials and advanced technology, our flawless flutes are made to stand the test of time.



## WATER-RESISTANT FOR LASTING PROTECTION

Engineered to withstand moisture and humidity, our water-resistant louvers are the perfect choice for kitchens, bathrooms, and high-moisture areas. Built with advanced materials and coatings, these louvers prevent swelling, warping, and surface damage.



## TERMITE & BORER RESISTANT FOR WORRY-FREE INTERIORS

Protect your spaces from hidden threats with our termite and borer-resistant flawless flutes. Engineered with specially treated materials, these panels create a strong defense against pests that commonly damage wood surfaces.




### APPLICATIONS:

Widely used in living rooms, bedrooms, office spaces, lobbies, commercial interiors, and even. Their primary applications include feature walls, ceilings, partitions, and cabinet fronts, giving spaces a premium and stylish touch.



## LIGHTWEIGHT FOR EFFORTLESS INSTALLATION

Designed with ease in mind, our lightweight louvers offer maximum style with minimal effort. Easy to handle, transport, and install, they reduce structural load without compromising on durability or design.

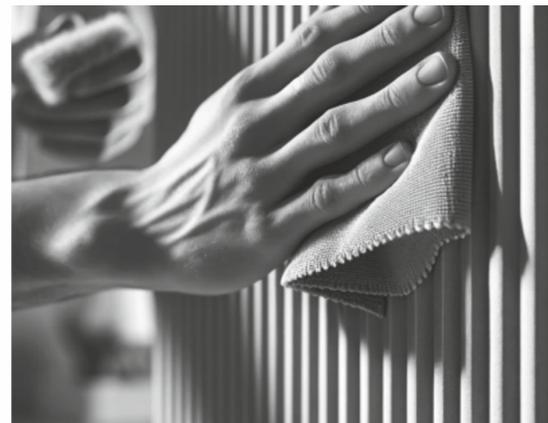

## STAIN-RESISTANT FOR SPOTLESS ELEGANCE

Say goodbye to stubborn marks and tedious cleaning! Our stain-resistant louvers are designed with a special surface coating that repels spills, smudges, and stains – keeping them looking fresh and flawless every day.



## EFFORTLESS ELEGANCE WITH MAINTENANCE-FREE LOUVERS

Crafted from high-quality, durable materials, our maintenance-free louvers are designed to resist dust, moisture and fading, ensuring long-lasting beauty with zero hassle.



# KNITTEL FLUTE



15003  
Pg. 36

15011

# SERIES 15000



200X160 MM

15010

Width: 200mm Length: 2900mm



200X160 MM

15011

Width: 200mm Length: 2900mm



# KNITTEL FLUTE

15007



# FLAWLESS FLUTES




# SERIES 15000



200 x 160 MM

15006

Width: 200mm Length: 2900mm

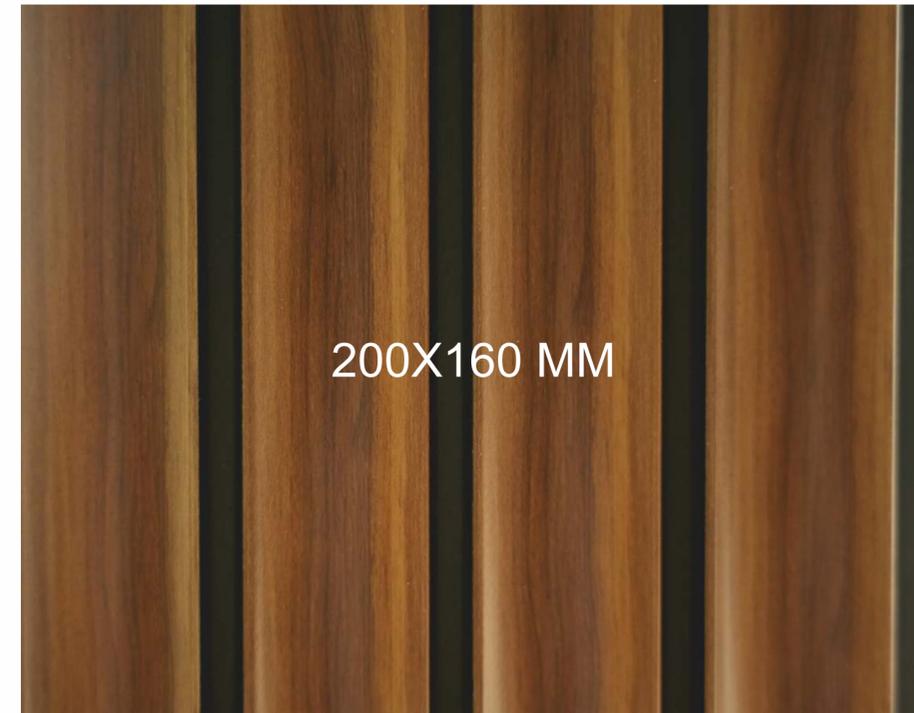

200 x 160 MM


15007

Width: 200mm Length: 2900mm




# PALDON FLUTE

# SERIES 16000

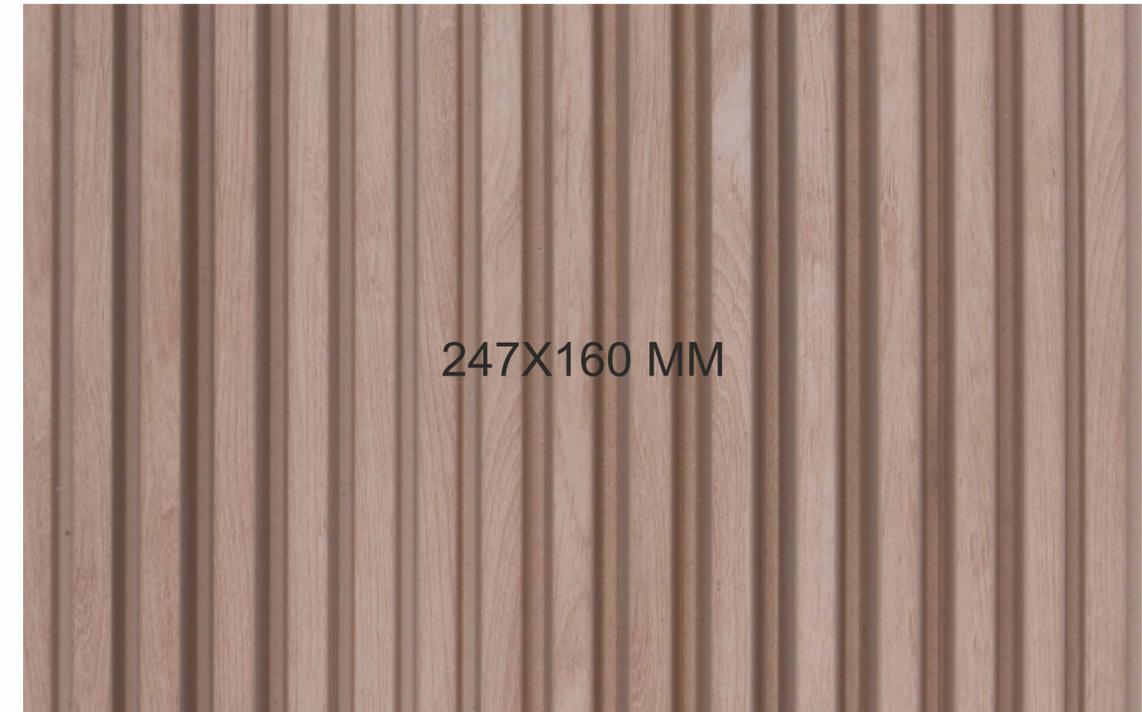

16002

Width: 247mm Length: 2900mm

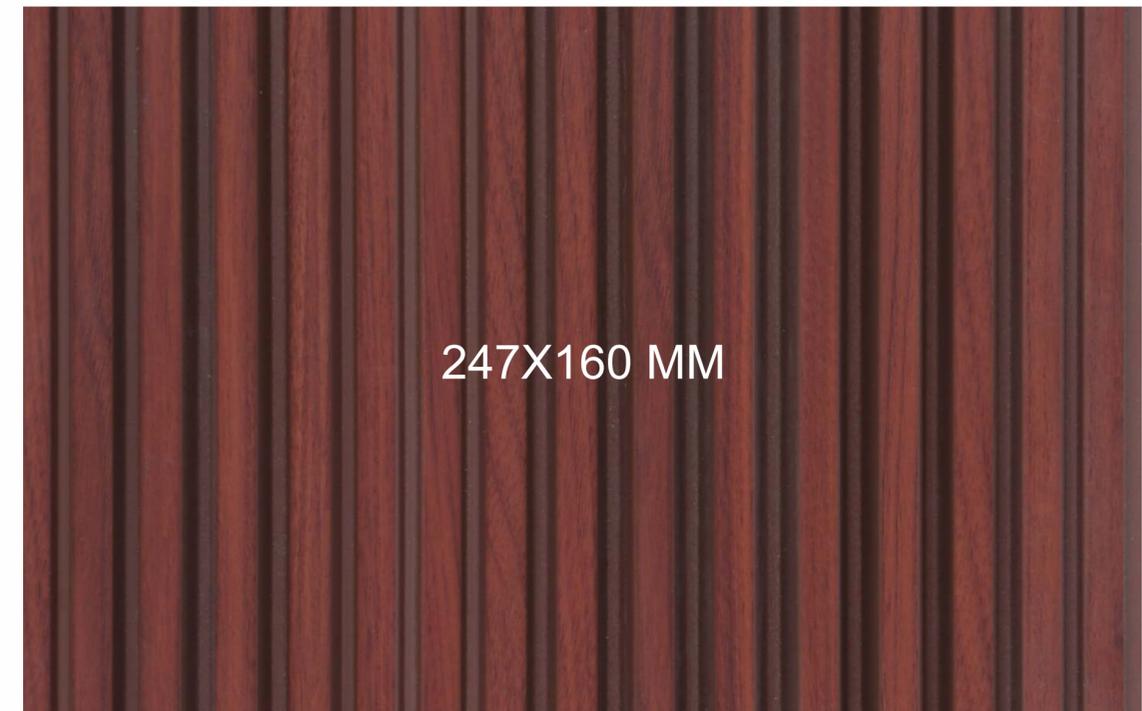


16005

Width: 247mm Length: 2900mm




# PALDON FLUTE

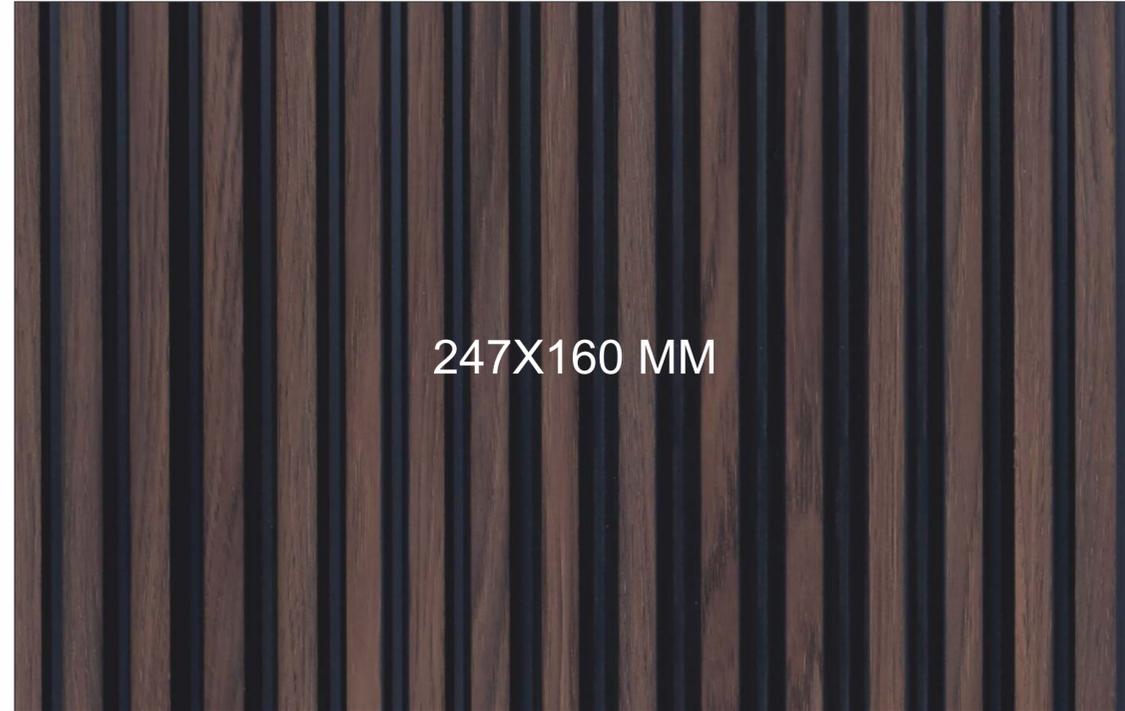

16004

Width: 247mm Length: 2900mm

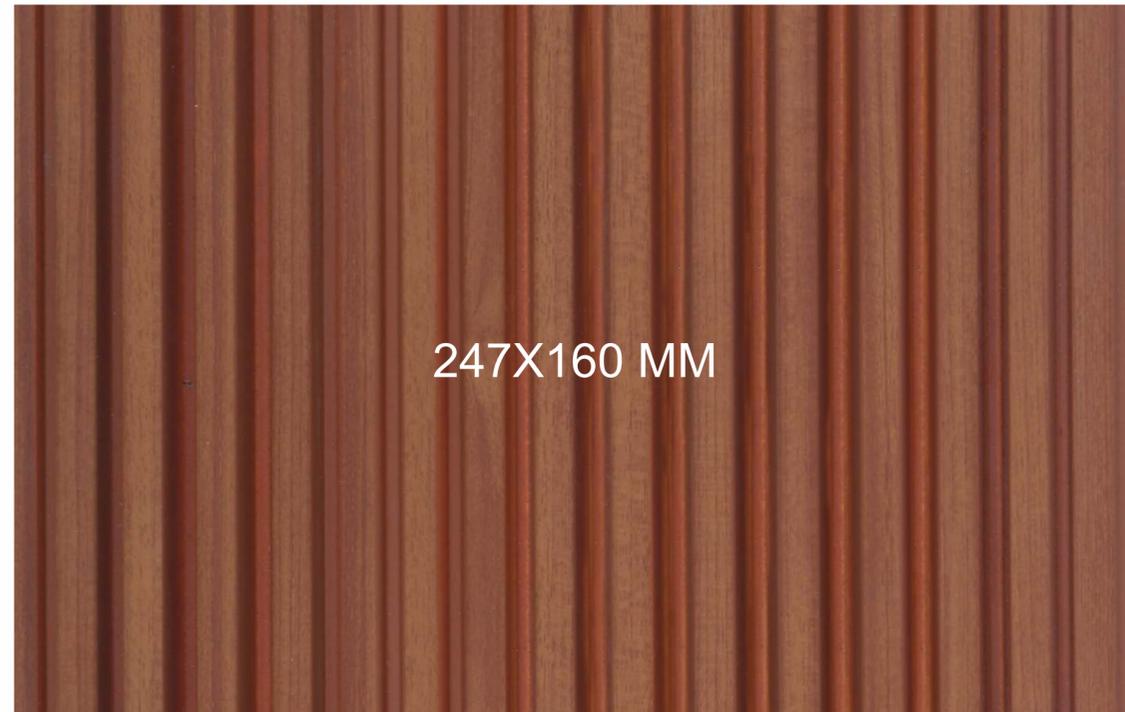

16007

Width: 247mm Length: 2900mm



# SERIES 16000




16007

# SARINDA FLUTE



# SERIES 15000

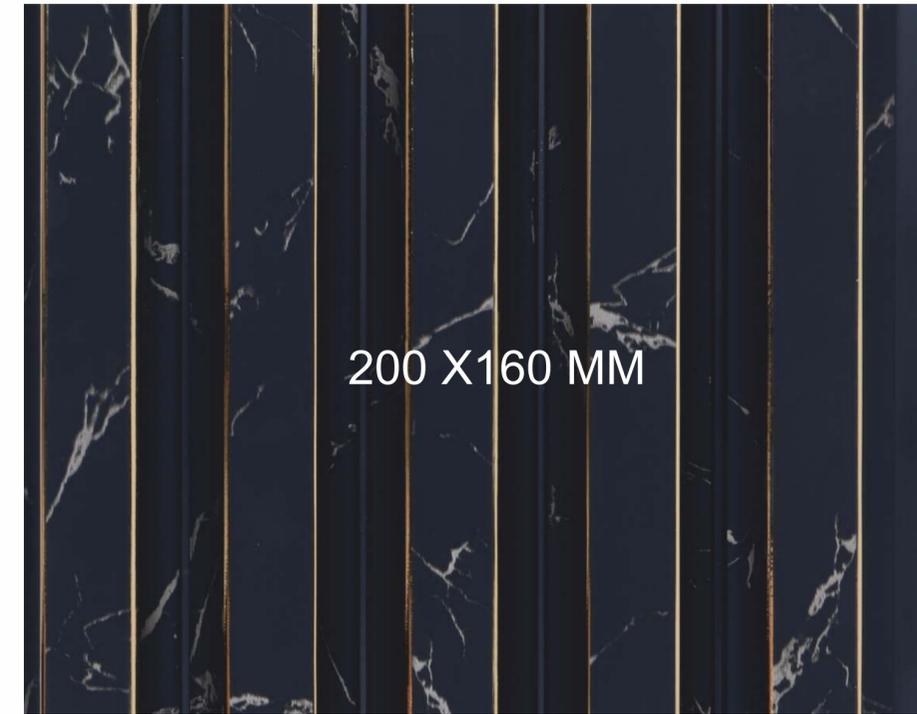

15009

Width: 200mm Length: 2900mm




15008

Width: 200mm Length: 2900mm



# SARINDA FLUTE

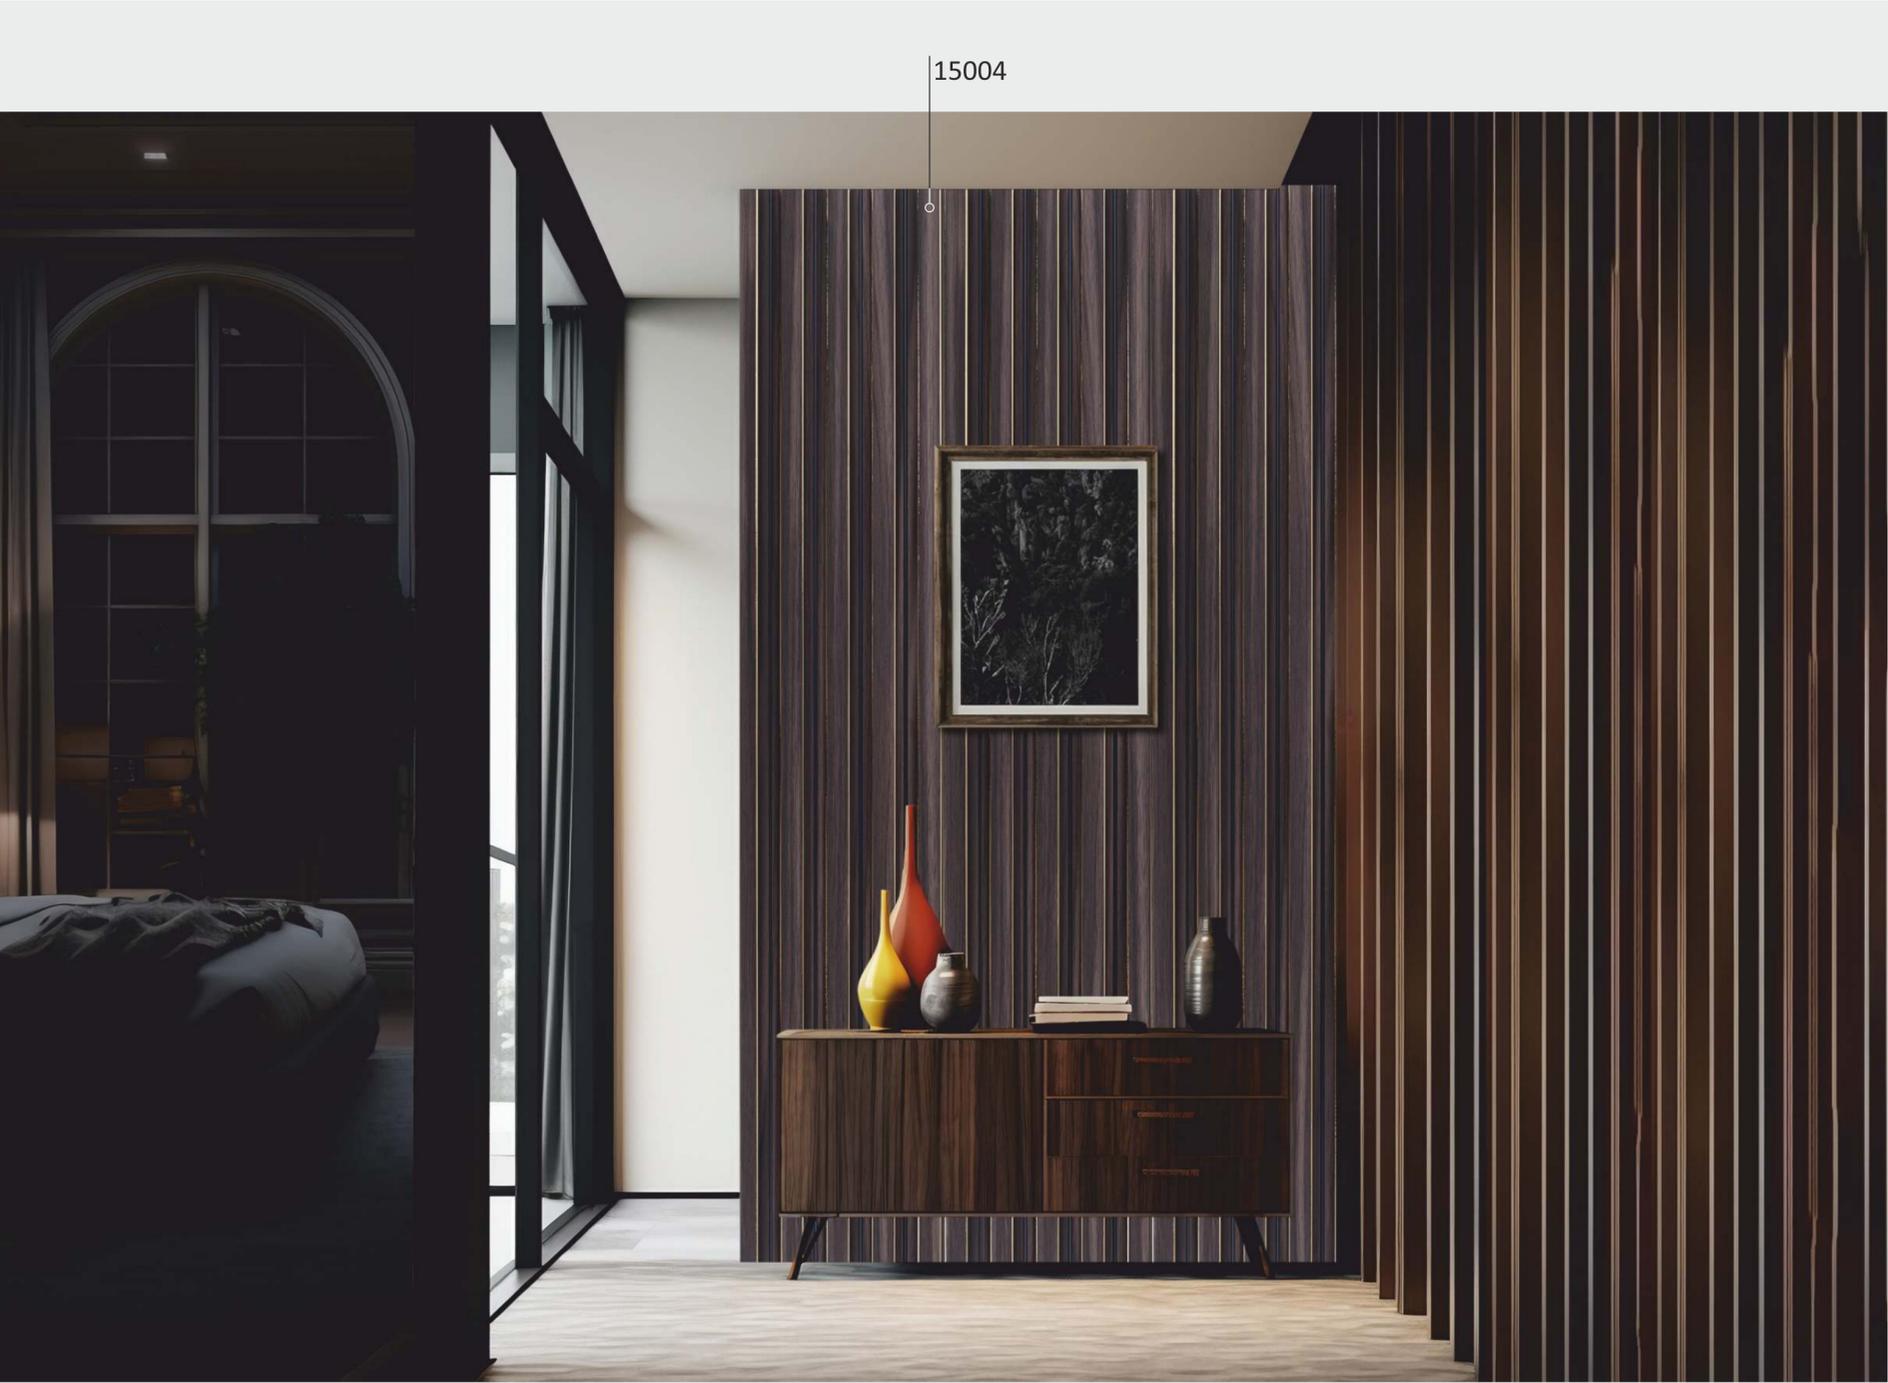

# SERIES 15000



15004

Width: 200mm Length: 2900mm



15005

Width: 200mm Length: 2900mm




# DAYEREH FLUTE

15012



# SERIES 15000

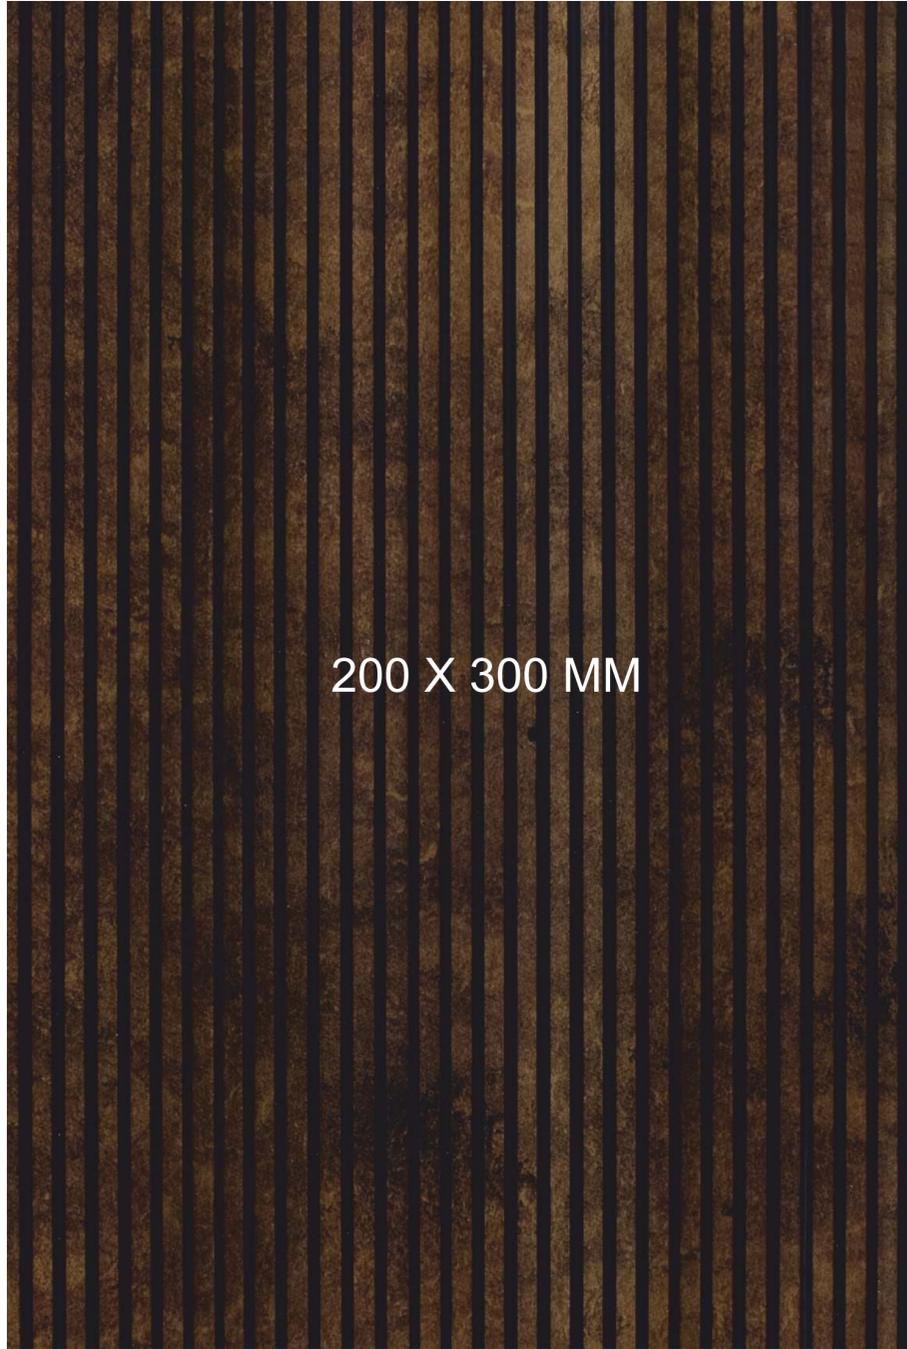

200 X 300 MM

15012

Width: 200mm Length: 2900mm



# OCARINA FLUTE



16009 Pg. 26

16010

# SERIES 16000



240X160 MM

16010

Width: 240mm Length: 2900mm



240X160 MM

16009

Width: 240mm Length: 2900mm






240X160 MM

16003

Width: 240mm Length: 2900mm

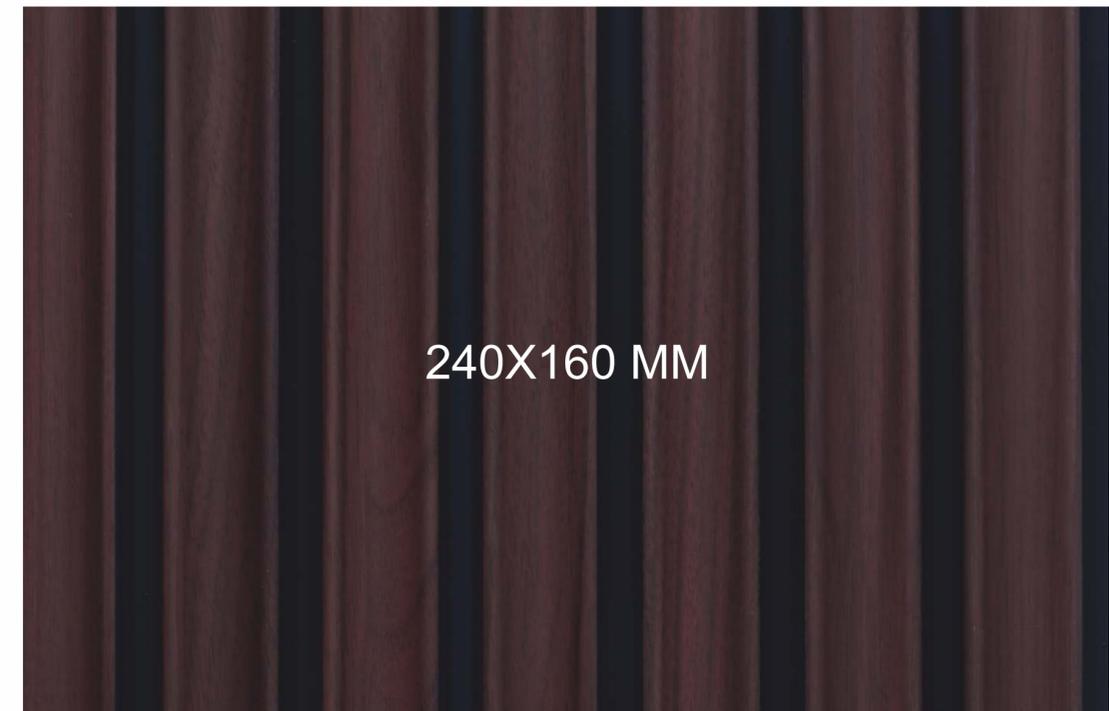

240X160 MM

16006

Width: 240mm Length: 2900mm



# TARKA FLUTE



16008

# SERIES 16000



240X300 MM

16008

Width: 240mm Length: 2900mm




# TARKA FLUTE

16001



# SERIES 16000

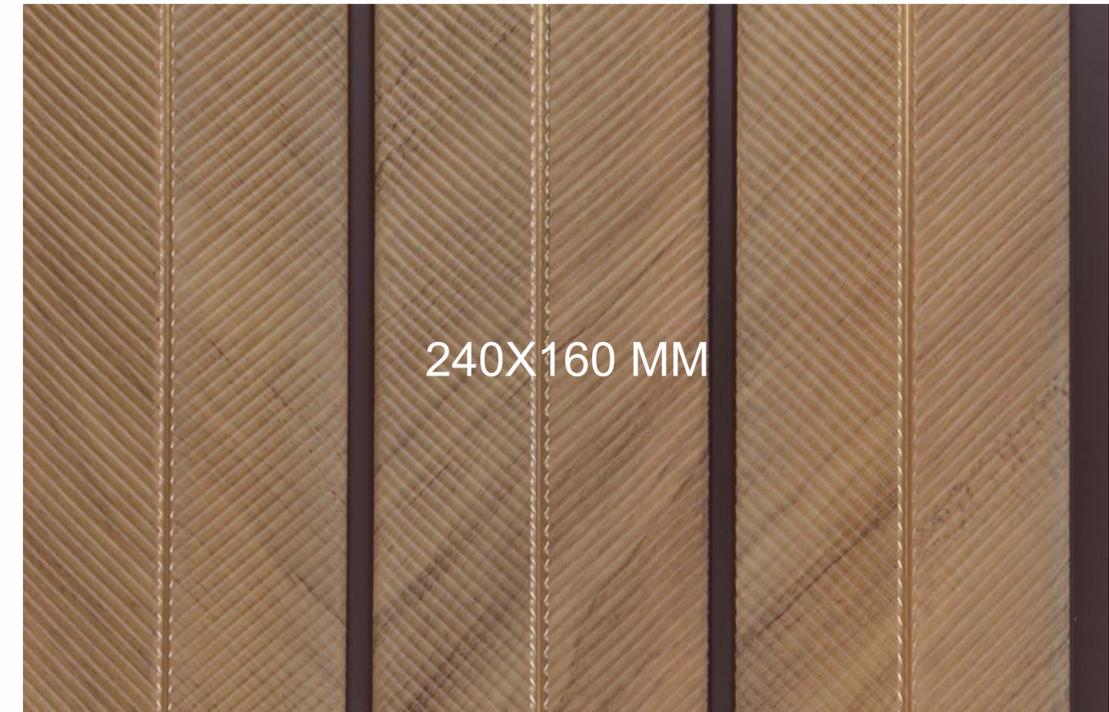

16001

Width: 240mm Length: 2900mm




16000

Width: 240mm Length: 2900mm




# HYPERBASS FLUTE

# SERIES 15000

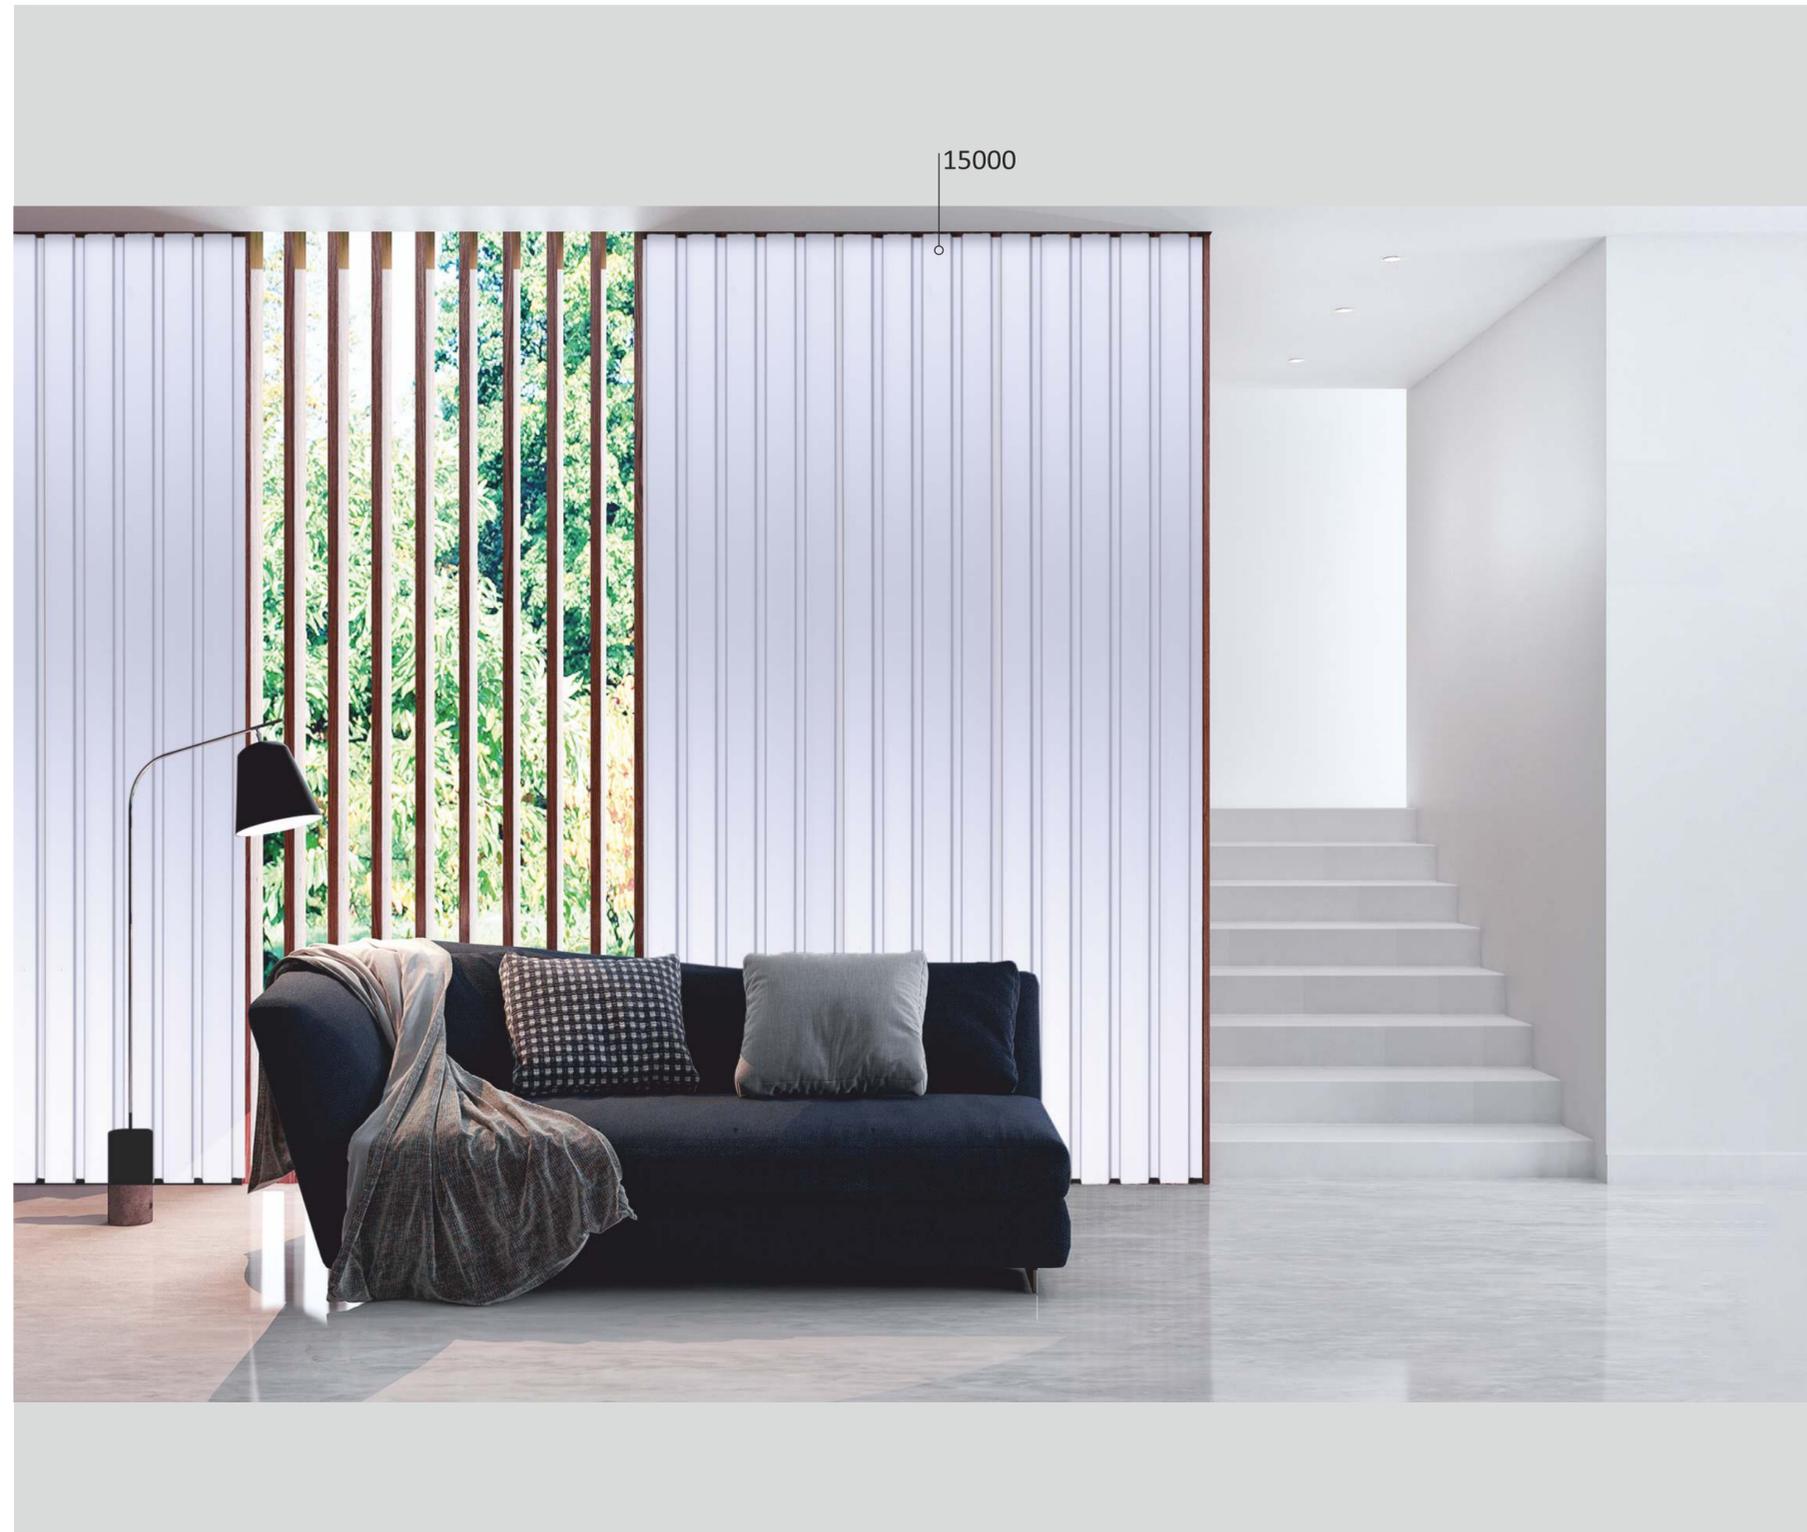


15000

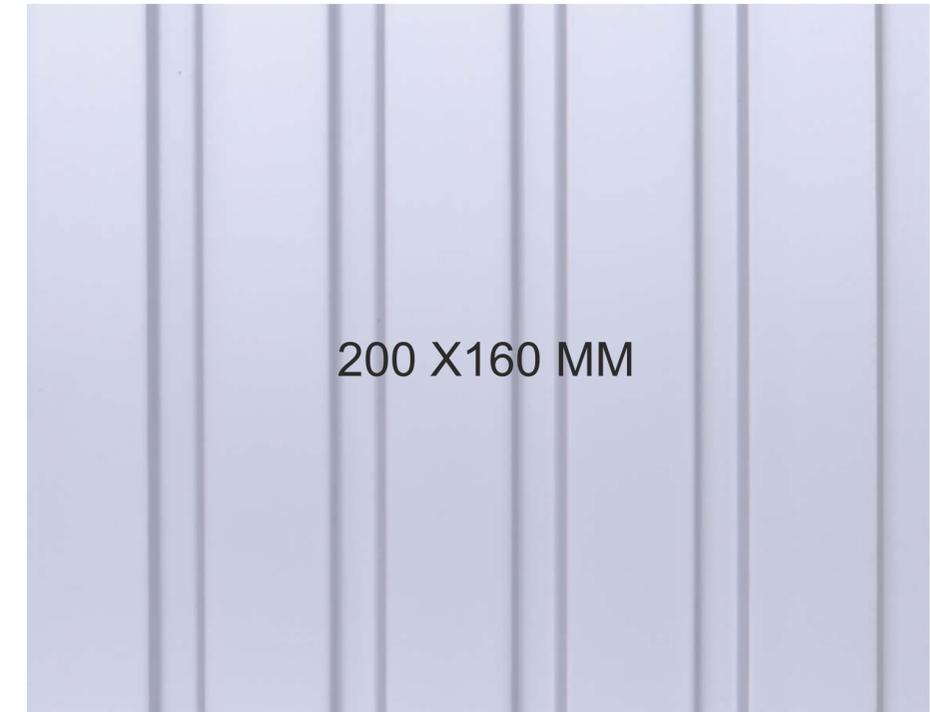

200 X160 MM

15000

Width: 200mm Length: 2900mm

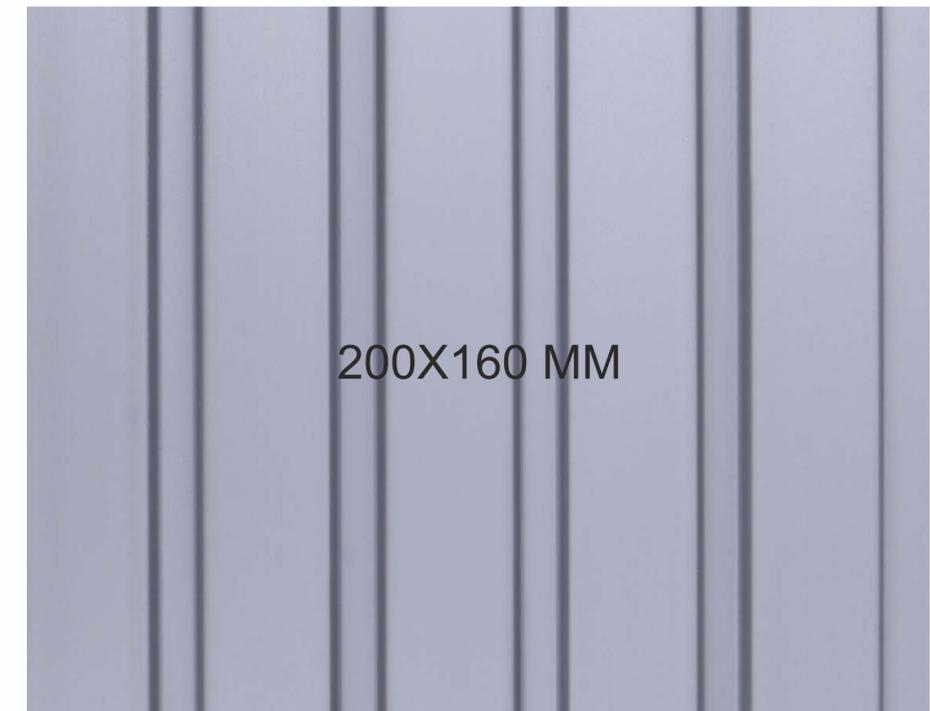

200X160 MM


15001

Width: 200mm Length: 2900mm



# HYPERBASS FLUTE

# SERIES 15000

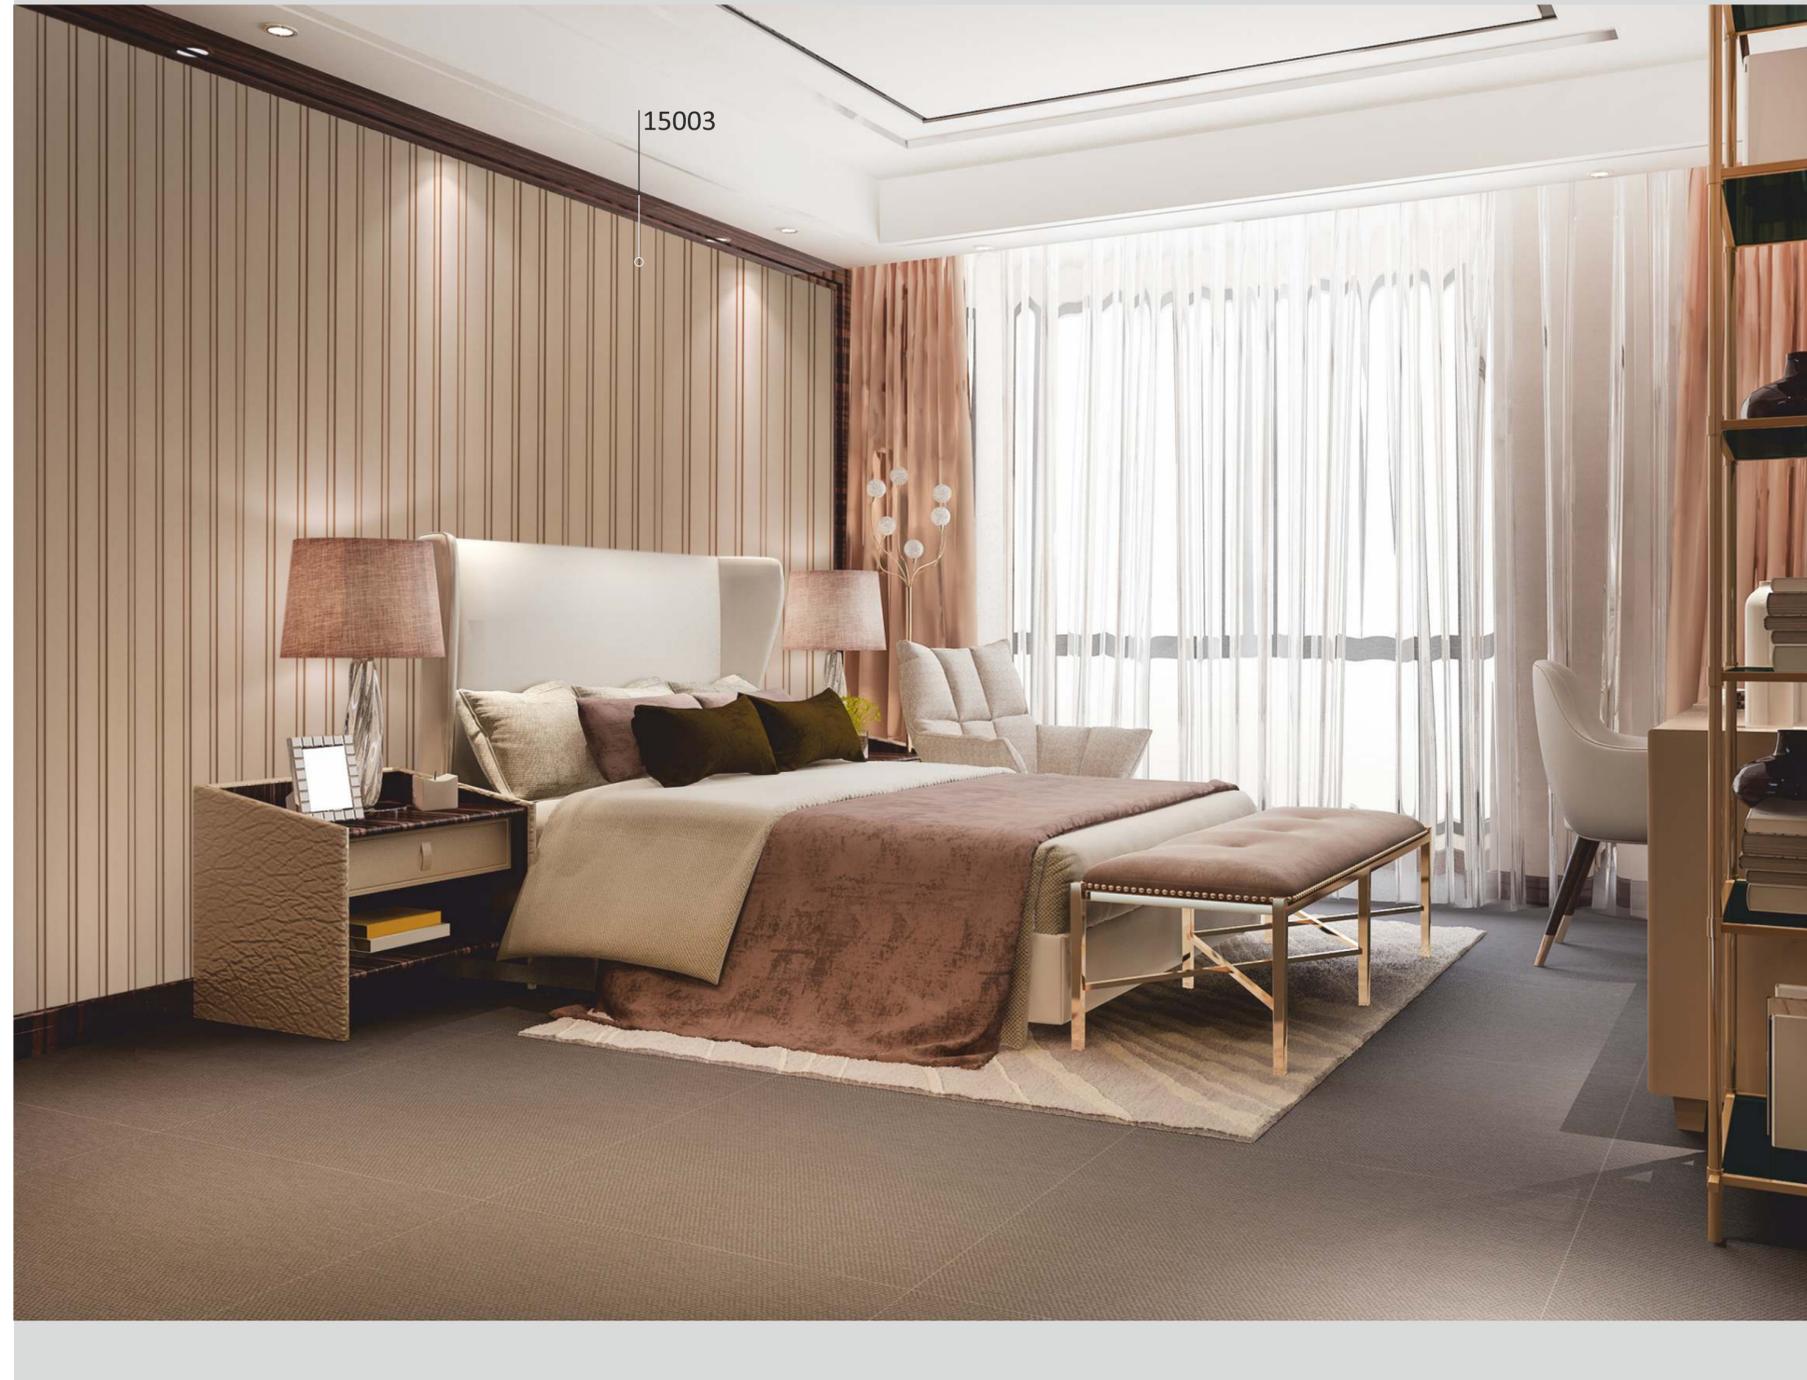

15003



200X160 MM

15002

Width: 200mm Length: 2900mm



200X160 MM

15003

Width: 200mm Length: 2900mm



# INDEX

S.NO.	SERIES	DESIGN NO.	PAGE NO.
1	15000	15000	28
2	15000	15001	28
3	15000	15002	30
4	15000	15003	30
5	15000	15004	16
6	15000	15005	16
7	15000	15006	08
8	15000	15007	08
9	15000	15008	14
10	15000	15009	14
11	15000	15010	06
12	15000	15011	06
13	15000	15012	18
14	16000	16000	26
15	16000	16001	26
16	16000	16002	10
17	16000	16003	22
18	16000	16004	11
19	16000	16005	10
20	16000	16006	22
21	16000	16007	11
22	16000	16008	24
23	16000	16009	20
24	16000	16010	20



## SERIES 15000, 16000


**MATERIAL : PS LOUVERS**    **LENGTH : 9.5FT.**    **WIDTH : 8 , 9.5 & 10 INCH**

### INSTALLATION RECOMMENDATIONS FOR FLAWLESS FLUTES

- SURFACE PREPARATION:**
  - Ensure the wall or ceiling surface is clean, dry, level, and free from dust, oil, or moisture.
  - For uneven surfaces, apply a plywood or MDF base for better alignment.
- CUTTING & TRIMMING:**
  - Use fine-toothed saws or panel cutters for smooth edges.
  - Always measure and mark before cutting to avoid wastage.
- INSTALLATION METHOD:**
  - Screw/Nail Fixing:** Use screws or nails, preferably with wooden or metal battens as support.
  - Maintain proper spacing between battens (usually 18–24 inches) for secure fixing.
- JOINING & ALIGNMENT:**
  - Use grooved joints, tongue-and-groove systems, or matching profiles to maintain seamless alignment.
  - For corner areas, use matching edge profiles or corner trims for a neat finish.
- VENTILATION & EXPANSION:**
  - Leave a 2–3 mm gap between panels to accommodate expansion due to temperature or humidity changes.
  - Ensure some airflow behind the panels to avoid moisture buildup.
- FINISHING TOUCHES:**
  - After installation, wipe the surface clean with a soft cloth.
  - For high-traffic areas, optional clear sealants can be used to enhance surface protection.



### CONSTRUCTION GUIDE Installation Tools

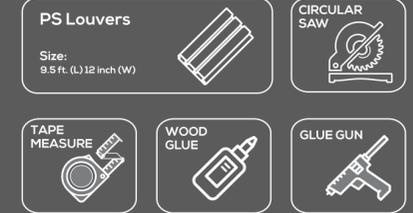

- Prep-work with plywood/MDF is recommended before the construction. Please remove any kind of wall paper/film on the surface of the base.
- Apply a quality adhesive on the back of the Louvers. Apply a small amount of hot melt (Glue-Gun) on the back of the Louvers.
- Louvers can be installed in both horizontal or vertical direction. Screwing on the tongue/interlocking space for better fixing.
- Circular saw to be used to cut required length.
- For corners, combine the two grooves.

\*Dimension Tolerance ± 3%

### FLAWLESS FLUTES HANDLING PRECAUTIONS:

- Avoid dragging them on the floor to prevent edge or surface damage.
- Do not expose louvers to direct sunlight for long periods before installation to prevent discolouration or expansion.
- Ensure the surface is clean, dry, level, and free from dust, oil, or moisture.
- Use soft damp cloth for cleaning. Do not use chemicals or cleaning agents.
- These panels are for interior use only.
- There may be colour difference between sample and actual sale product.
- Use the same lot panels as different lot panels may have colour difference.

*Note : This folder is only for product promotion and it is not made for sale.*

Variations in color, shading, and weave patterns reflect the authentic character of the product, they are not flaws. Every effort has been made to provide accurate product descriptions and technical specifications. However, errors or omissions, if any, please let us know. Please note that technical specifications are subject to change without prior notice. Advance Laminate warrants that all products are free from manufacturing defects and are suitable for normal usage conditions.

No claims or warranties are applicable once the product is installed.

Dimensional tolerance : ± 5–10%